


ICOP-2720

Tiny VGA/LCD Development Kit

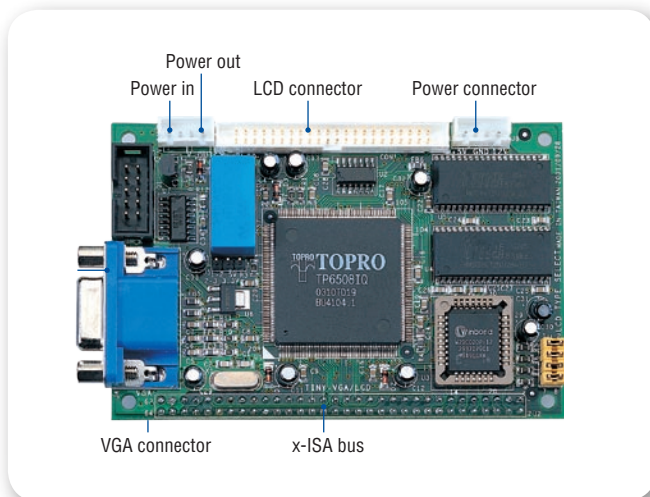

Specifications


Chipset	TOPRO TP65081Q VGA and Mono/STN/DSTN/TFT Flat Panel interface support
Bus	16-bit x-ISA interface
VGA Memory	Onboard 1MB EDO RAM, support resolution up to 1024 x 768, 256 colors
Connectors	2.0mm 44-pin box header for LCD x1 2.54mm 10-pin box header for VGA x1 2.54mm 4-pin wafer for +12V, -12V, -5V DC-in x1 2.54mm 4-pin wafer for internal relay x1 External 15-pin D-Sub Female connector for VGA x1
Power Requirement	Single Voltage +5V @ 200mA
Weight	32g
Board Size	100 x 66mm (3.94 x 2.6 inches)
Operating Temperature	-20°C ~ +60°C

Packing List

- ICOP-2720 x1

ICOP-2820

Mity-Mite VGA/LCD Development Kit

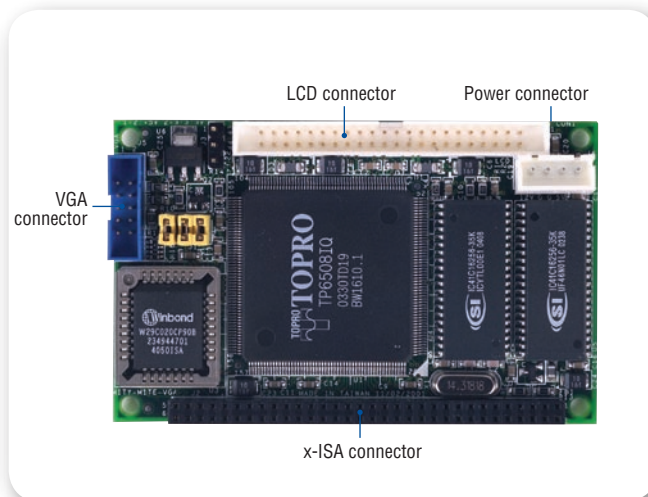

Specifications

Chipset	TOPRO TP65081Q VGA and Mono/STN/DSTN/TFT Flat Panel interface support
Bus	16-bit x-ISA interface
VGA Memory	Onboard 1MB EDO RAM, support resolution up to 1024 x 768, 256 colors
Connectors	2.0mm 64-pin socket for 16-bit x-ISA interface x1 2.0mm 44-pin box header for LCD x1 2.0mm 10-pin box header for VGA x1 2.54mm 4-pin wafer for +12V, -12V, -5V DC-in x1
Power Requirement	Single Voltage +5V @ 200mA
Weight	32g
Board Size	80 x 50mm (3.14 x 1.96 inches)
Storage Temperature	-20°C ~ +60°C

Packing List

- ICOP-2820 x1
- Cable
VGA (2.0) x1