



Vortex86-6084AV

Tiny x-PCI Video Captured & Audio I/O Module

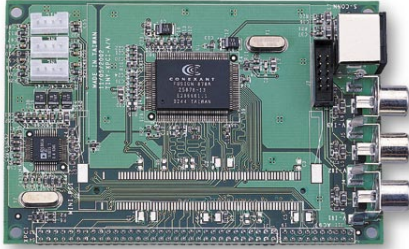

Vortex86-6084A

Tiny x-PCI Audio I/O Module

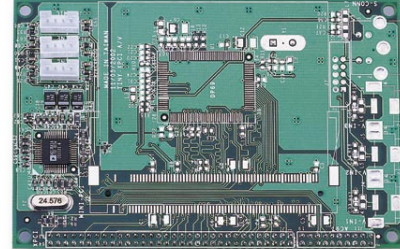

Specifications

Function	Tiny x-PCI Video/Audio Capturer and I/O Module
Chipset	Video Decoder-Conexant Fusion 878A Audio CODEC-Analog Devices AD1881A, AC97 compatible
Bus	32-bit x-PCI interface, compatible with PCI Rev.2.2, PC 98/99
I/O Interface	Video-in (Video Capture) port x5 Line-in/Line-out/MIC-in port x3
Driver	Windows 9X/2000/XP/NT Linux/ FreeBSD Driver
Connectors	2.0mm 10-pin box header for Video-in x1 2.0mm 4-pin wafer for Line-in/Line-out/MIC-in x3 RCA connector for composite signal input x3 External 4-pin Mini Din connector for composite signal input x1
Power Requirement	Single Voltage +5V @150mA
Weight	45g
Board Size	100 X 66mm (3.93 x 2.59 inches)
Operating Temperature	0°C ~ +70°C

Packing List

- Vortex86-6084AV x1
- Cable
Audio Line x3

Specifications

Function	Tiny x-PCI Audio I/O Module
Chipset	Audio CODEC-Analog Devices AD1881A, AC97 compatible
Bus	32-bit x-PCI interface, compatible with PCI Rev.2.2, PC 98/ 99
I/O Interface	Line-in/Line-out/MIC-in port x3
Driver	Windows 9X/XP/NT, Windows WDM Driver Red Hat Linux Driver Debian Linux Driver Mandrake Linux Driver
Connectors	2.0mm 4-pin wafer for Line-in/Line-out/MIC-in x3
Power Requirement	Single Voltage +5V @60mA
Weight	40g
Board Size	100 X 66mm (3.93 x 2.59 inches)
Operating Temperature	0°C ~ +70°C

Packing List

- Vortex86-6084A x1
- Cable
Audio Line x3

1

Mity/Tiny Module

2

PC/104 Module

3

3.5"/ATX Module

4

Half-Size Module

5

Peripheral Module

6

Accessories